


Size	6F22 E-Block		
Nominal voltage	8.4V (9V)		
Capacity (mAh)	C/2	C/5	
	Maximum	300	
	Typical	270	
Width	26.2 ± 0.5 mm 1.031 ± 0.02 inch		
Thickness	15.5 ± 0.5 mm 0.614 ± 0.02 inch		
Height	48.4 ± 0.5 mm 1.905 ± 0.02 inch		
Weight	40 ± 2g		
Approx. Internal impedance at 1000Hz at charged state.	420 mΩ		
Charge Start voltage 7.0V	Standard	0.1C x 14 Hrs	
	Quick: with control (-ê V, 0 to 5mV/cell)	0.5C x 2 ~2.5 Hrs	
	Rapid: with control (-ê V, 0 to 5mV/cell)	1.0C x 1~1.2 Hrs	
Discharge	Standard	0.2C	
	High Rate	2.0C	
Ambient temperature	Charge	Standard	0°C to 45°C
		Quick	10°C to 40°C
	Discharge		-20°C to 60°C
	Storage		-20°C to 40°C Less than three months
			-20°C to 30°C Less than one year

**Typical Characteristics**

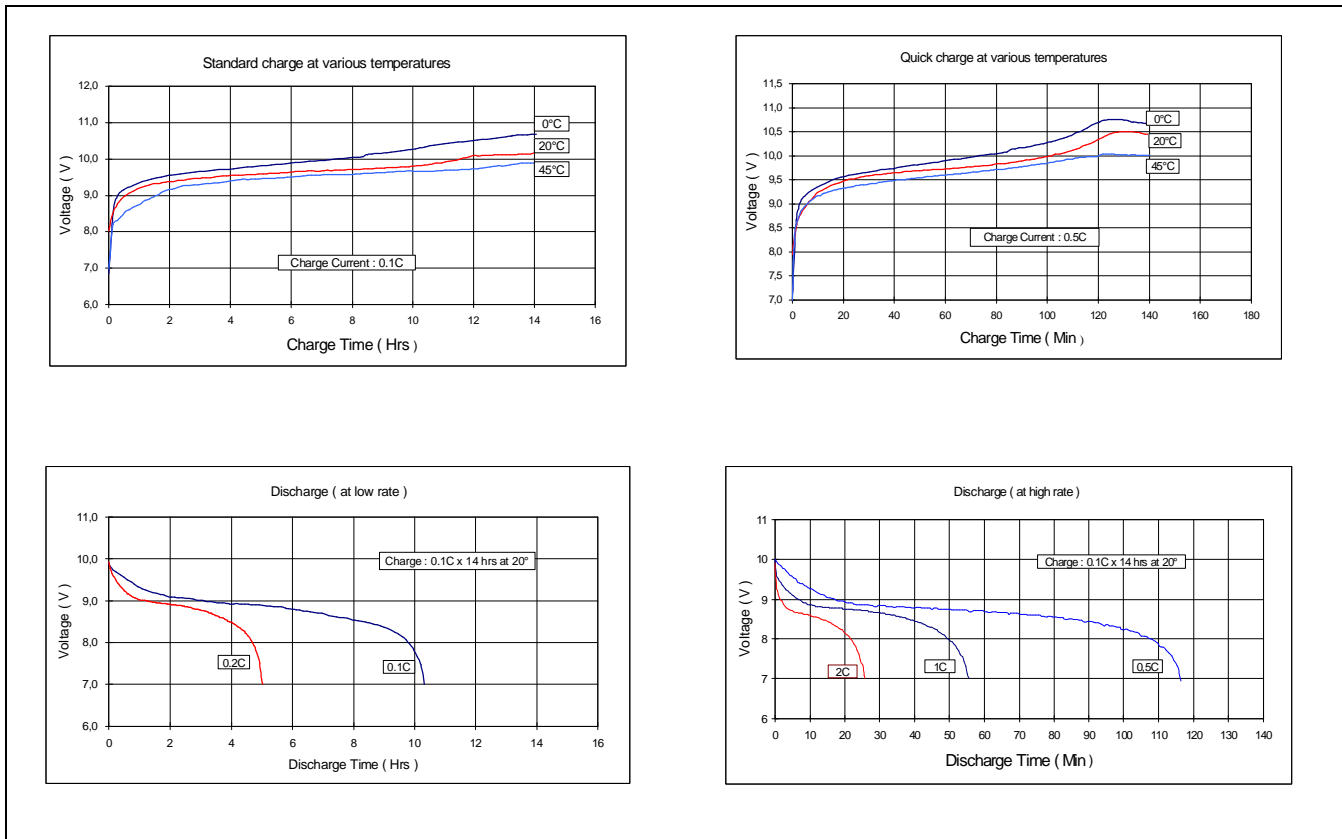

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Data in this specification is subject to change without notice.